

Safety

Remember, flying safely is your responsibility.


DO NOT FLY NEAR:



People



Airports



Power lines




Cars





Storms

First Flight




Attach your flying lines using a Lark's Head knot as shown.



Unwind your lines and check that the flying line in your right hand is connected to the right-hand bridle with the kite pointed up. If not, switch hands. Some people color code their line ends with a magic marker to make this check easy.

Clear your flying area. Make sure there are no people in your flying space. A sharp, sweeping pull on both lines will launch your kite. Keep your arms by your side and your hands low at all times for best control.


Tuning



Once you can keep the kite in the air comfortably in moderate winds, try switching your bridle to the radical setting for quicker turns and tighter spins. Find complete tuning information in the "Flight Training" section of your Prism CDROM or on the Prism website at www.prismkites.com

Specifications

Wingspan: 8 feet
Wind Range: 4-25 mph
Frame: .230 carbon/hemp,
J65 + K75 glass
Sail: Chikara ripstop nylon
Rec'd lines: 150# x 85'



© 2000 Prism Designs Inc. All rights reserved.

Legacy

If you're just getting into sport kites, congratulations - you've made a great choice in kites! The Legacy is tough and forgiving enough to learn on but its sophisticated wing shape and excellent balance make it a kite you'll never outgrow.

Once you've mastered the basics (it takes most people 1 to 3 hours of flying to get the hang of it), set the quick-adjust bridle to the radical setting and challenge yourself with quicker turns and tighter spins. When you're ready to advance into light wind flying, upgrade your Legacy with the High Performance carbon frameset and fly effortlessly on those days when there's hardly a breath of wind.

Read this field card carefully to be sure you assemble and adjust your new Legacy correctly before flying. For loads of information on all aspects of sport kiting, from kite tuning to the latest tricks, visit our website at www.prismkites.com.

Our Word

At Prism we guarantee everything we make. That means that if you're not happy, we're not happy. If you have a problem with your kite and your retailer is unable to help, please contact us by phone, fax, or e-mail and we'll do everything we can to make things right.

Smooth winds!

Inside:

Assembly

Safety

First Flight


Tuning

Specifications

FIELD CARD

prism


ASSEMBLY

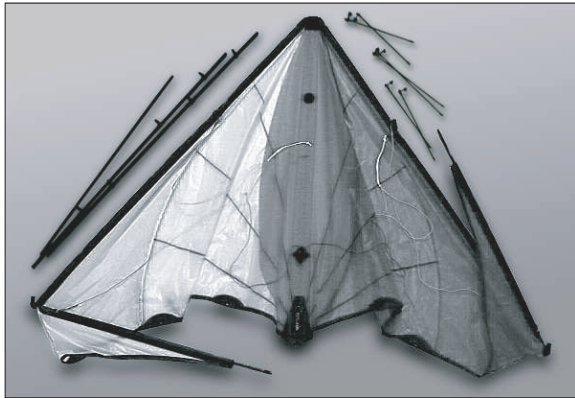

1

Unroll your sail and lay it out as shown. In addition to the sail, you should have:

- Two long lower spreaders (one male, one female)
- One short upper spreader
- Two short standoffs
- Two medium standoffs
- Two long standoffs

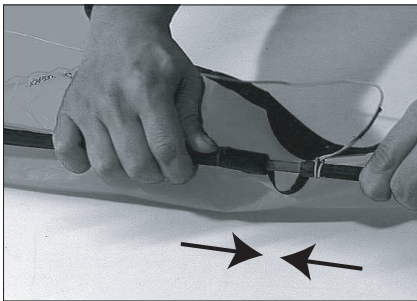



2

Connect the leading edge rods for each wing at the ferrules. Be sure the bridles are attached beneath the rubber fittings as shown.





3

Using your upper spreader as a tool, tension the elastic at each wingtip as shown.



4


With your wingtips tensioned, check that the sail is smooth and wrinkle-free along the leading edge. The tighter your tip tension, the better.



5


Clip your standoff rods into the holes in the back edge of the sail:

Longest rods: Middle holes
Medium rods: Inner holes
Shortest rods: Outer holes

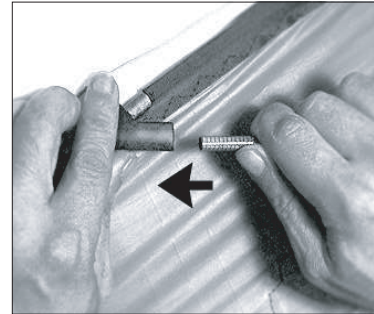

6

Insert the upper and lower spreaders all the way into the leading edge fittings. Check that the bridles are clear of the fittings, and hold the spreader rods close to the end as shown so you don't slip and puncture the sail.

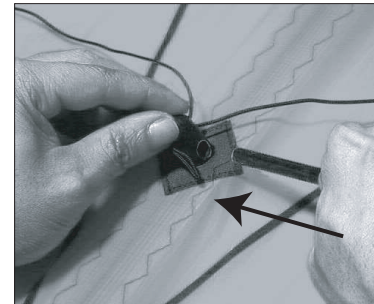

7

Insert the male and female lower spreader ends into the center "T" fitting.

Tension the sail by inserting the standoffs into the lower spreader fittings. Hang the kite from the bridles to check that they aren't tangled.

